




AceWatchDog™

For Hot-N-Pop and K9 Heat Alarm® Pro

AWD-7010

Install Manual

Install in dry location and follow procedures outlined in the vehicles modifier guide provided by the vehicle manufacture.

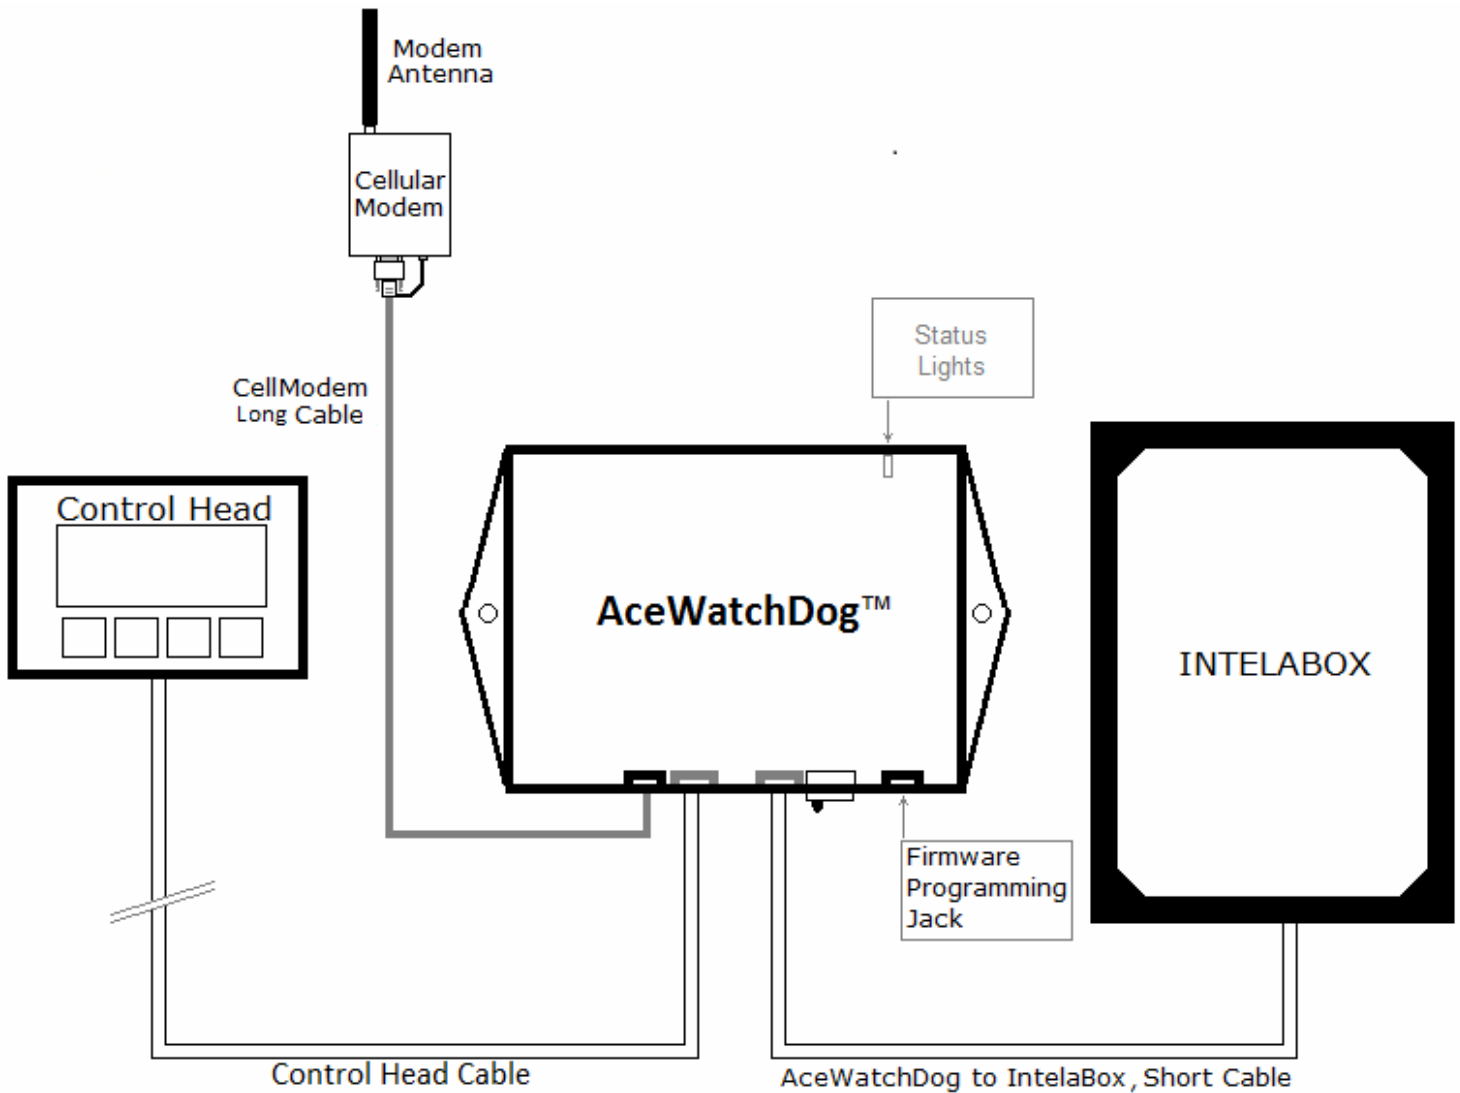

Drawing Not to Scale

Install Steps

- 1) Mount the AceWatchDog™ CellModem on the inside of the windshield passenger side or the inside of a rear side window. **Make sure the Antenna is NOT near metal and IS near the window for access to good cell signal.**
- 2) Mount the AceWatchDog™ unit in a dry location near the Intelabox and Positive Relay Module.
- 3) Connect the long cable between the Modem and the 6 Pin telco jack (left side) on the AceWatchDog™ unit.
- 4) Unplug the Control Head cable from Intelabox and plug it into either of the silver jacks on the AceWatchDog™ unit.
- 5) Connect the short jumper cable between the other silver jack on the AceWatchDog™ unit and the Intelabox.
(The 4 Pin telco jack (right side) is only used for Firmware Programming)

ATTENTION INSTALLER:

Please record the AceWatchDog™ Serial Numbers

WP- ___ ___ ___ ___ ___ and the CellModem S/N that looks similar to

MAC- ___ ___ ___ ___.

For AceWatchDog™ to function, a setup by the K9 Handler Online at www.AceLogin.com needs to be completed.

Make sure the Handler gets the AceWatchDog™ User Guide

AceWatchDog™ Status LEDs Functions

When the final connection is made the heat alarm control head will indicate power is applied; at this point the AceWatchDog's Red, Yellow, and Green will FLASH briefly.

The **Red LED** will stay **ON** indicating that a **message is pending** to be sent. The **Yellow LED** FLASHES as data flows to the **Cell Modem**. It stays ON at 50% brightness when connected to the Internet. Data flashes then occur at 100% brightness.

The **Green LED** FLASHES as data flows from the **IntelaBox**. It stays ON at 50% brightness when IntelaBox data is captured. Data flashes then occur at 100% brightness.

The **Red LED** turns **OFF** when the **pending message is successfully sent**.

To properly shut down the AceWatchDog™, turn OFF the Hot-N-Pop or Heat Alarm Pro and allow the AceWatchDog™ to send the OFF message to the Internet and then power itself down.



AceWatchDog™

For Hot-N-Pop and K9 Heat Alarm® Pro

AWD-7010

Install Manual